

STEEL | WOOD | CONCRETE SLAB (APPROXIMATELY 3-4"), ACOUSTITECH LEAD 4.5, SUSPENDED CEILING WIRES AND CHANNELS | DOUBLE GLUED DOWN

Acoustic performance

AllC: 54 to 58

ASTC: 58 to 62

ASSEMBLY DETAILS

STRUCTURE

Steel

ASSEMBLY COMPONENTS

Concrete slab (approximately 3-4"),
AcoustiTECH Lead 4.5, Suspended
ceiling wires and channels

FLOOR TYPE

Wood

INSTALLATION TYPE

Double glued down

GLUE


Adhesive AD-532+, Adhesive AD-316,
Adhesive AD-844 MS

CEILING TYPE

Suspended

NUMBER OF GYPSUM

1

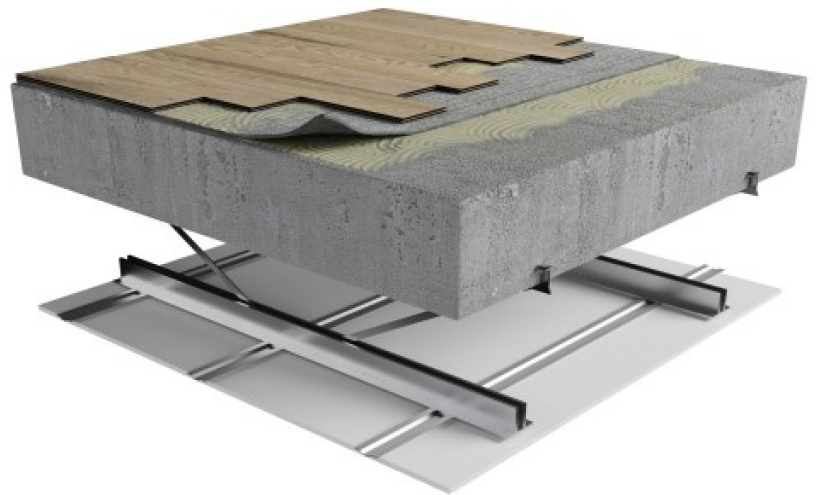

ADHESIVE AD-532+



Plus de
détails

ACOUSTITE CH LEAD 4.5



Plus de

ADHESIVE AD-316



Plus de
détails

ADHESIVE AD-844 MS



Plus de
détails

détails

www.acousti-tech.com