

STEEL | LAMINATE | CONCRETE SLAB (APPROXIMATELY 3-4"), ACOUSTITECH VP, SUSPENDED CEILING WIRES AND CHANNELS | FLOATING

Acoustic performance AIIC: 55 to 59 ASTC: 58 to 62

ASSEMBLY DETAILS

STRUCTURE

Steel

ASSEMBLY COMPONENTS

Concrete slab (approximately 3-4"), AcoustiTECH VP, Suspended ceiling wires and channels

FLOOR TYPE

Laminate

INSTALLATION TYPE

Floating

CEILING TYPE


Suspended

NUMBER OF GYPSUM

1

ACOUSTITECH VP



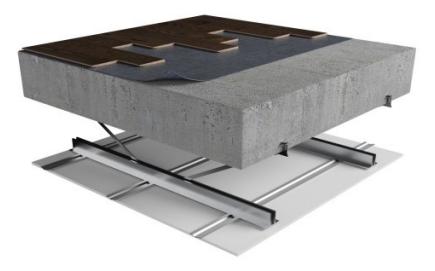

www.acousti-tech.com