

**STEEL | WOOD | CONCRETE SLAB (APPROXIMATELY 3-4"),  
ACOUSTITECH LEAD 4.5, SUSPENDED CEILING WIRES AND CHANNELS |  
DOUBLE GLUED DOWN**

Acoustic performance

AllC: 54 to 58

ASTC: 58 to 62

**ASSEMBLY DETAILS**

**STRUCTURE**

Steel

**ASSEMBLY COMPONENTS**

Concrete slab (approximately 3-4"),  
AcoustiTECH Lead 4.5, Suspended  
ceiling wires and channels

**FLOOR TYPE**

Wood

**INSTALLATION TYPE**

Double glued down

**GLUE**


Adhesive AD-532+, Adhesive AD-316,  
Adhesive AD-844 MS

**CEILING TYPE**

Suspended

**NUMBER OF GYPSUM**

1

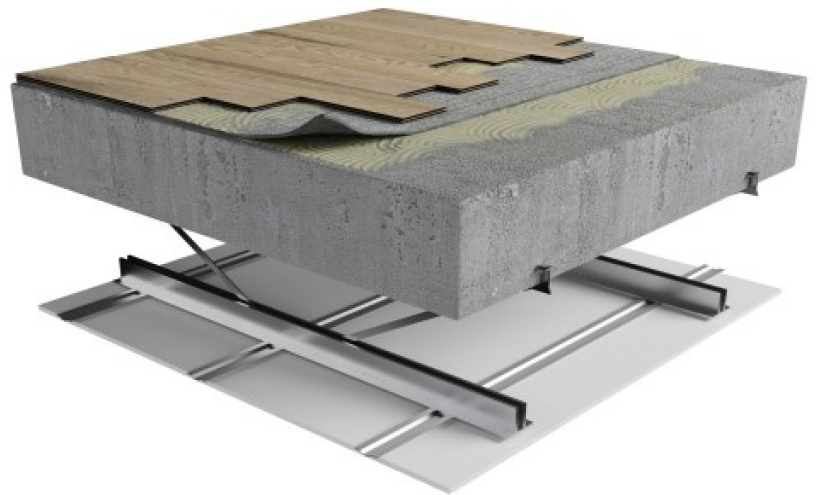

**ADHESIVE  
AD-532+**



Plus de  
détails

**ACOUSTITE  
CH LEAD  
4.5**



Plus de

**ADHESIVE  
AD-316**



Plus de  
détails

**ADHESIVE  
AD-844 MS**



Plus de  
détails

détails

[www.acousti-tech.com](http://www.acousti-tech.com)