

## **STEEL | WOOD | CONCRETE SLAB (APPROXIMATELY 3-4"), ACOUSTITECH LEAD 3.3, SUSPENDED CEILING WIRES AND CHANNELS | DOUBLE GLUED DOWN**

Acoustic performance

AIIC: 52 to 56

ASTC: 58 to 62

### **ASSEMBLY DETAILS**

#### **STRUCTURE**

Steel

#### **ASSEMBLY COMPONENTS**

Concrete slab (approximately 3-4"),  
AcoustiTECH Lead 3.3, Suspended  
ceiling wires and channels

#### **FLOOR TYPE**

Wood

#### **INSTALLATION TYPE**

Double glued down

#### **GLUE**


Adhesive AD-844 MS, Adhesive AD-316,  
Adhesive AD-532+

#### **CEILING TYPE**

Suspended

#### **NUMBER OF GYPSUM**

1

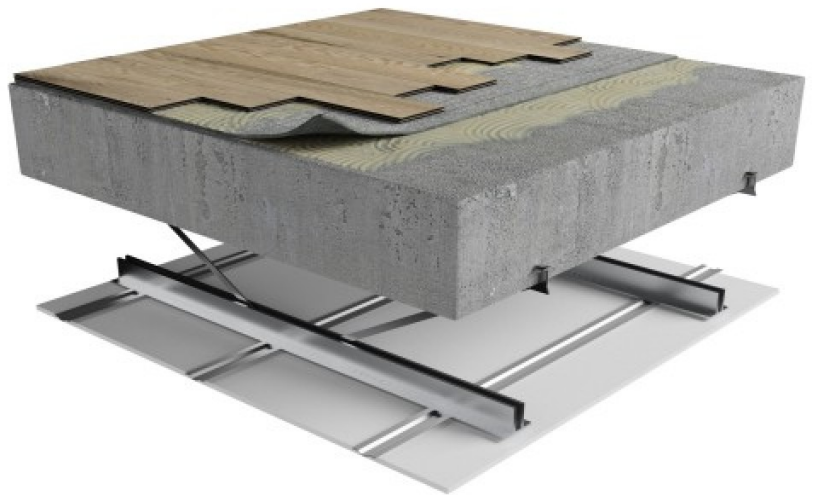

#### **ACOUSTITE CH LEAD 3.3**



Plus de

#### **ADHESIVE AD-844 MS**



Plus de  
détails

#### **ADHESIVE AD-316**



Plus de  
détails

#### **ADHESIVE AD-532+**



Plus de  
détails

détails

[www.acousti-tech.com](http://www.acousti-tech.com)