

## **STEEL | LAMINATE | CONCRETE SLAB (APPROXIMATELY 3-4"), ACOUSTITECH VP, SUSPENDED CEILING WIRES AND CHANNELS | FLOATING**

Acoustic performance

AiIC: 55 to 59

ASTC: 58 to 62

### **ASSEMBLY DETAILS**

#### **STRUCTURE**

Steel

#### **ASSEMBLY COMPONENTS**

Concrete slab (approximately 3-4"),  
AcoustiTECH VP, Suspended ceiling  
wires and channels

#### **FLOOR TYPE**

Laminate

#### **INSTALLATION TYPE**


Floating

#### **CEILING TYPE**

Suspended

#### **NUMBER OF GYPSUM**

1

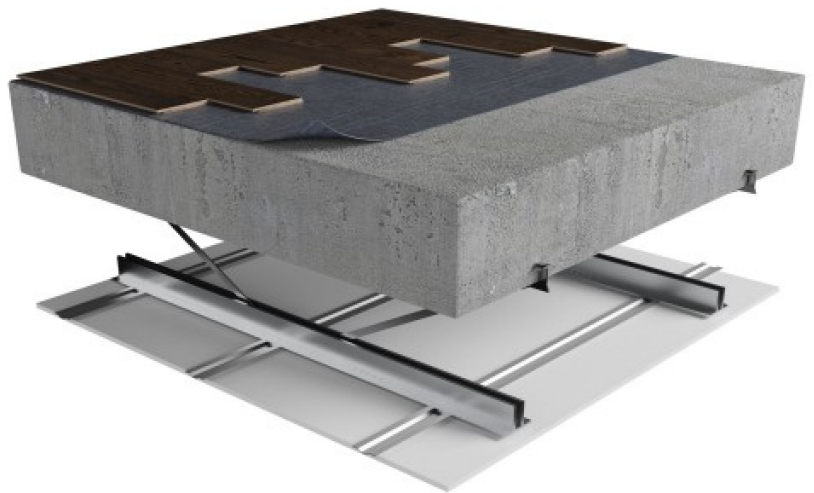

### **ACOUSTITECH VP**



[Plus de détails](#)