

CONCRETE | WOOD | ACOUSTITECH LEAD 3.3, SUSPENDED CEILING WIRES AND CHANNELS | DOUBLE GLUED DOWN

Acoustic performance
AIIIC: 65 to 73
ASTC: 65 to 70

ASSEMBLY DETAILS

STRUCTURE

Concrete

ASSEMBLY COMPONENTS

AcoustiTECH Lead 3.3, Suspended ceiling wires and channels

FLOOR TYPE

Wood

INSTALLATION TYPE

Double glued down

GLUE


Adhesive AD-844 MS, Adhesive AD-316, Adhesive AD-532+

CEILING TYPE

Suspended

NUMBER OF GYPSUM

1

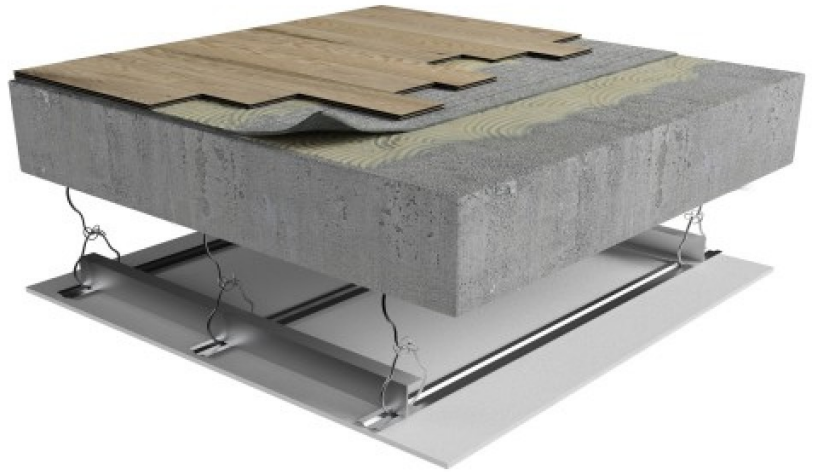

ADHESIVE AD-844 MS



Plus de détails

ACOUSTITECH LEAD 3.3



Plus de détails

ADHESIVE AD-316



Plus de détails

ADHESIVE AD-532+



Plus de détails