

CONCRETE | WOOD | ACOUSTITECH LEAD 4.5, SUSPENDED CEILING WIRES AND CHANNELS | DOUBLE GLUED DOWN

Acoustic performance

AllC: 65 to 73

ASTC: 65 to 70

ASSEMBLY DETAILS

STRUCTURE

Concrete

ASSEMBLY COMPONENTS

AcoustiTECH Lead 4.5, Suspended ceiling wires and channels

FLOOR TYPE

Wood

INSTALLATION TYPE

Double glued down

GLUE


Adhesive AD-844 MS, Adhesive AD-316, Adhesive AD-532+

CEILING TYPE

Suspended

NUMBER OF GYPSUM

1

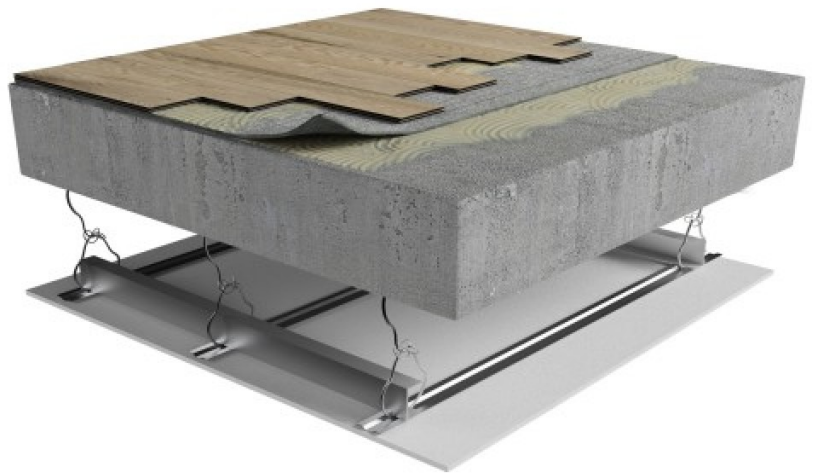

ADHESIVE
AD-844 MS



Plus de détails

ACOUSTITECH
LEAD 4.5



Plus de détails

ADHESIVE
AD-316



Plus de détails

ADHESIVE
AD-532+



Plus de détails