

LIGHT WOOD | CERAMIC | 1"1/2 CONCRETE TOPPING, 5/8" T&G PLYWOOD, ACOUSTITECH CERAMIC, FLEXIBLE MORTAR, MORTAR, INSONOMAT (SOPREMA) | MORTAR

Acoustic performance

AllC: 48 to 53

ASTC: 58 to 62

ASSEMBLY DETAILS

STRUCTURE

Light wood

ASSEMBLY COMPONENTS

1"1/2 concrete topping, 5/8" T&G plywood, AcoustiTECH Ceramic, Flexible mortar, Mortar, Insonomat (Soprema)

FLOOR TYPE

Ceramic

INSTALLATION TYPE

Mortar

GLUE


Adhesive AD-280

CEILING TYPE

Resilient channels

NUMBER OF GYPSUM

2

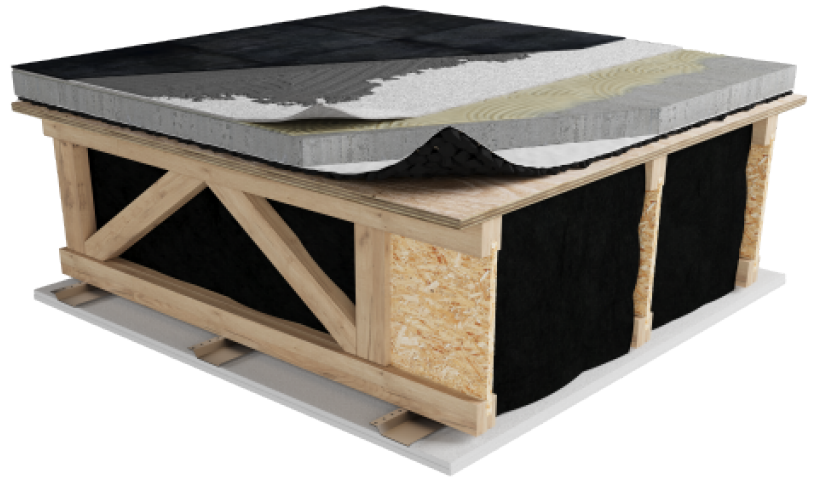

***OTHER MEMBRANES AVAILABLE :**

The Insonomat membrane (Soprema) can be substituted with the Silentcrete membrane (Soprema) (See assembly picture above).

**ACOUSTIT
ECH
CERAMIC**



Plus de
détails

**ADHESIV
E AD-280**



Plus de
détails

**INSONOM
AT
(SOPREM
A)**



Plus de
détails

