

LIGHT WOOD | CERAMIC | INSONOMAT (SOPREMA), 1"1/2 CONCRETE TOPPING, 5/8" T&G PLYWOOD, ACOUSTITECH CERAMIC, FLEXIBLE MORTAR, MORTAR | MORTAR

Acoustic performance

AllC: 48 to 53

ASTC: 58 to 62

ASSEMBLY DETAILS

STRUCTURE

Light wood

ASSEMBLY COMPONENTS

Insonomat (Soprema), 1"1/2 concrete topping, 5/8" T&G plywood, AcoustiTECH Ceramic, Flexible mortar, Mortar

FLOOR TYPE

Ceramic

INSTALLATION TYPE

Mortar

GLUE


Adhesive AD-280

CEILING TYPE

Resilient channels

NUMBER OF GYPSUM

2

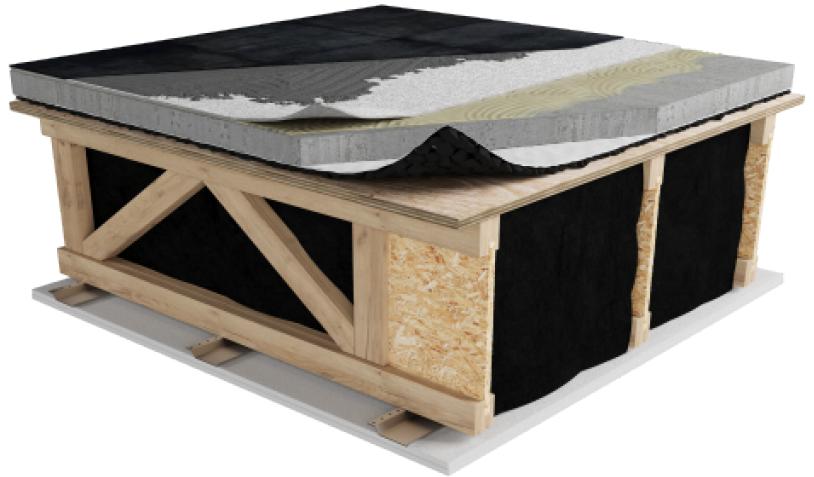

**INSONOMAT
AT
(SOPREMA)
A)**



Plus de
détails

**ACOUSTITECH
CERAMIC**



Plus de
détails

**ADHESIVE
AD-280**



Plus de
détails

www.acousti-tech.com